




ITS Cabinet
PN 36H24W20DITS



NEMA4X Enclosure
10" x 8" x 6" - PN 342395
14" x 12" x 8" - PN 342608

NEMA 3R ITS Enclosure

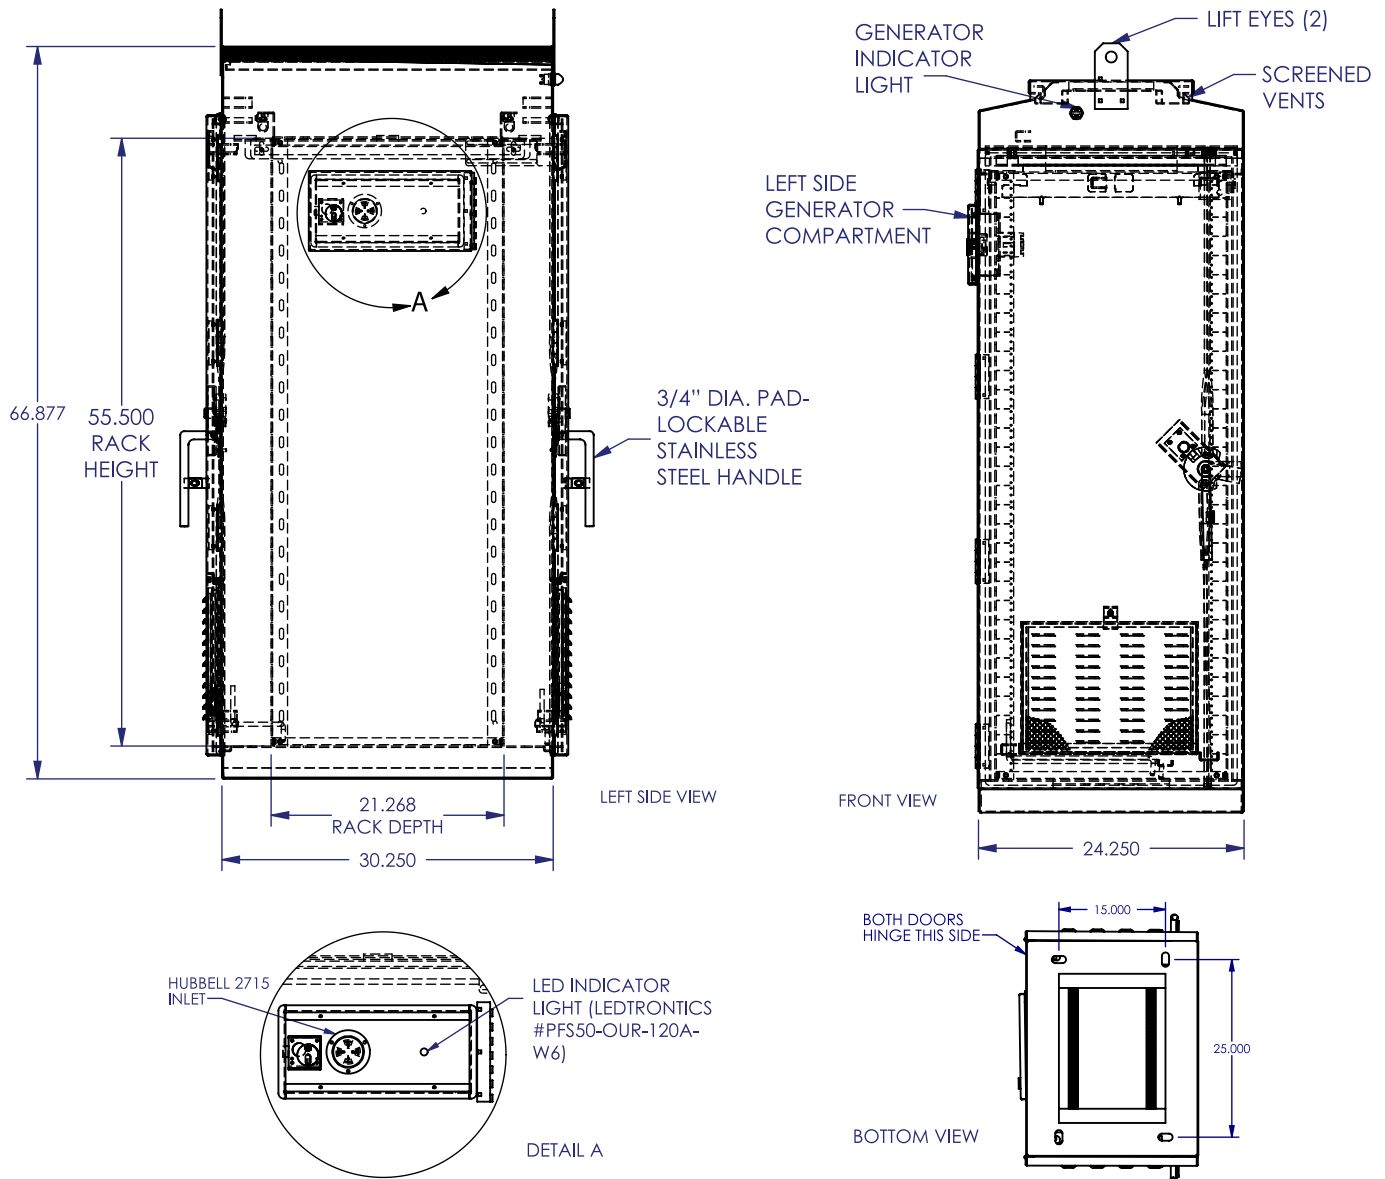

Cabinet is constructed from .125" thick 5052 H-32 aluminum with a mill finish and is base mounted.

Cabinet has the front door hinged on the left (as viewed from the front) and the rear door hinged on the right (as viewed from the rear). Both doors have louvers with 14" x 16" metal air filters with louver filter covers, 3/4" dia. pad-lockable stainless steel handles with three point latching, two position door stops, four stainless steel hinges per door, and are sealed with closed cell neoprene gasket with a top gasket retainer and document pouch brackets.

Cabinet has screened vents on the left and right sides, a dual 4" fan plenum, (2) lifting eyes, a 19" EIA rack (31 RU).

Cabinet has a generator compartment mounted on the left side, access door is labeled "Generator Access Door". Generator compartment has a Hubbell 2715 inlet and an LED indicator light inside compartment. A green "Utility On" status indicator light is located on front of cabinet above door.

All hardware is stainless steel.

Cabinet is rated 3R.

NEMA 4X Enclosure

Construction	Fiberglass hinged solid door 4X rated Light gray UL 508A, NEMA/EEMAC type 4X CSA File # 42186 IEC 60529, IP66 Screw or quick latch versions available	Dimensions	Two sizes available Overall Dimensions: 10" x 8" x 6" PN 342395 14" x 12" x 8" PN 342608
		Environment	Indoor/Outdoor